

REMARKS

Claims 1-7, 9-15, 18-34, 55 and 62-74 were previously pending in this application. Claims 1, 2, 13, 18, 19, 27-29, 62, 63 and 70 are amended. No new claims have been added. As a result claims 1-7, 9-15, 18-34, 55 and 62-74 are pending for examination with claims 1, 13, 18 and 62 being independent claims. No new matter has been added.

Rejections Under 35 U.S.C. §102

The Office Action rejects claims 1-3, 5, 7, 9-14, 18-20, 22, 24, 26-27, 30, 32-34, 55, 62-64, 66, and 67-73 under 35 U.S.C. §102(e) as being anticipated by U.S. Patent No. 6,695,269 to Anscher (hereinafter "Anscher").

As an initial matter, Applicant notes that Anscher is a continuation-in-part of Application No. 09/216,680 (hereinafter the '680 application). A copy of the '680 application obtained from the U.S. Patent Office is attached here as Attachment A for the Examiner's reference. To carry back the 35 U.S.C. §102(e) date of Anscher to the filing date of the '680 application, the '680 application must support the invention claimed in the instant application as required by 35 U.S.C. §112, first paragraph. (MPEP 2136.03(IV).) Applicant respectfully asserts that the '680 application does not support the invention claimed in claims 1, 13, 18 and 62 as required by 35 U.S.C. §112, first paragraph and therefore has a filing date of the CIP (Anscher) for the purpose of independent claims 1, 13, 18 and 62.

Anscher was filed on September 19, 2000. Applicant's priority application, Application No. 60/206,172, was filed on May 22, 2000. A copy of Applicant's priority application is attached here as Attachment B for the Examiner's reference. Applicant's priority application fully supports each of independent claims 1, 13, 18 and 62. Because Applicant's priority application adequately supports and enables the subject matter of each of claims 1, 13, 18 and 62, each of these claims is entitled to the benefit of the filing date of Applicant's priority application. (MPEP 201.11(I)(A).)

In contrast, the '680 application does not include Figures 14, 15a, and 15b and also fails to describe the embodiments illustrated in those figures. Accordingly, the subject matter of Figures 14, 15a and 15b is not entitled to the priority date of the '680 application. Thus, the embodiments illustrated in Figures 14, 15a and 15b of Anscher are not prior art to the instant

application because the portion of Anscher that discloses Figures 14, 15a and 15b was filed four months after the filing date of the Applicant's priority application. The following remarks address the patentability of the claims as amended herein in view of the remainder of Anscher, i.e., in view of Figures 1-13 and the associated description.

As amended, claim 1 recites "a fastener assembly comprising: a fastening element; and a fastener comprising: a base; a housing connected to the base, the housing adapted to retain the fastening element when the fastening element is inserted in the housing; and a depressible latch connected to the base external to the housing and positioned relative to the housing to retain the fastening element by interference with a lateral surface of the fastening element, the depressible latch including a surface that is proximate an opening in the housing and is externally accessible with the fastening element retained in the housing, the depressible latch configured such that the fastening element is inhibited from being removed from the housing absent an application of a force applied to the surface proximate the opening to depress the depressible latch." Similarly, claim 13 recites "a depressible latch connected to the base external to the housing," claim 18 recites "a latch connected to the base external to the housing," and claim 62 recites "the depressible latch is connected to the base external to the housing."

Applicant respectfully asserts that neither Anscher nor any of the other cited references describe a latch connected to the base external to the housing in combination with the remaining features of any of claims 1, 13, 18 and 62. Thus, claims 1, 13, 18 and 62 are not anticipated by Anscher. Further, each of claims 2, 3, 5, 7, 9-12, 14, 19, 20, 22, 24, 26, 27, 30, 32-34, 55, 63, 64, 66, and 67-73 depend either directly or indirectly from one of independent claims 1, 13, 18 and 62. Accordingly, reconsideration and withdrawal of the rejection of claims 1-3, 5, 7, 9-14, 18-20, 22, 24, 26-27, 30, 32-34, 55, 62-64, 66, and 67-73 under 35 U.S.C. §102(e) as being anticipated by Anscher is respectfully requested.

Rejections Under 35 U.S.C. §103

The Office Action rejects claims 6, 23, 31 and 67 under 35 U.S.C. §103(a) as being unpatentable over U.S. Patent No. 6,695,269 to Anscher in view of U.S. Patent No. 5,507,610 to Benedetti et al. (hereinafter "Benedetti"). Each of independent claims 1, 13, 18 and 62 is

Serial No.: 09/862,858

Art Unit: 3673

patentable in view of Anscher as described above. Each of claims 6, 23, 31 and 67 depends from one of the allowable independent claims. Benedetti fails to cure the deficiencies of Anscher, namely Benedetti fails to disclose a fastener comprising a base, and a depressible latch connected to the base external to a housing that retains a fastening element. Accordingly, each of claims 6, 23, 31 and 67 is patentable in view of Anscher in view of Benedetti at least for the reasons described above. Accordingly, reconsideration and withdrawal of the rejection of claims 6, 23, 31 and 67 under 35 U.S.C. §103(a) as being unpatentable over Anscher in view of Benedetti is respectfully requested.

CONCLUSION

In view of the foregoing amendments and remarks, reconsideration is respectfully requested. This application should now be in condition for allowance; a notice to this effect is respectfully requested. If the Examiner believes, after this amendment, that the application is not in condition for allowance, the Examiner is requested to call the Applicant's attorney at the telephone number listed below.

A petition and fee for a one month extension of time is included herewith. If this response is not considered timely filed in view of the petition and fee and if a request for an extension of time is otherwise absent, Applicant hereby requests any necessary extension of time. If there is a fee occasioned by this response, including an extension fee, that is not covered by an enclosed payment, please charge any deficiency to Deposit Account No. 50/2762, Ref. No. C0852-7013.

Respectfully submitted,
Robert B. Chaffee, Applicant

By: /Robert V. Donahoe/
Robert V. Donahoe, Reg. No. 46,667
LOWRIE, LANDO & ANASTASI, LLP
One Main Street
Cambridge, Massachusetts 02142
United States of America
Telephone: 617-395-7000
Facsimile: 617-395-7070

Attachment A

UNITED STATES SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN that I, Joseph Anscher, a United States citizen, residing at 1928 Midlane, Muttontown, NY 11791, have invented certain new and useful improvements in a

MULTI-PURPOSE ATTACHMENT DEVICE

of which the following is a specification.

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to a multi-purpose attachment device for use on backpacks. In particular, this invention relates to a sliding device for attachment to backpacks and which can be coupled to several different attachment pieces for holding a variety of implements.

2. The Prior Art

Hikers and bicyclists often have the need to attach various implements to the outside of their backpacks. Articles such as flashlights, keys, hydration tubes, etc. are more conveniently carried in an easily accessible place on the backpack's shoulder straps than inside the backpack. This enables the user to reach the implements without having to remove the backpack. This is especially important with hydration tubes, which may must be accessible while a cyclist is riding his other bicycle.

There are several devices that clip to the shoulder straps of backpacks for holding hydration tubes or other implements, depending on the shape and configuration of the device. However, the user may have the need for different devices on different days, depending on the activity planned. Attaching several different devices to the shoulder strap would be inconvenient and unwieldy. Therefore, it would be desirable to have an attachment device for use on a backpack shoulder strap that can accommodate a variety of different implements.

SUMMARY OF THE INVENTION

It is therefore an object of the invention to provide an attachment device for a backpack shoulder strap that can be used to hold a variety of different implements.

It is another object of the invention to provide an attachment device for a backpack shoulder strap that can also be attached to a chest strap.

It is yet another object of the invention to provide an attachment device that is simple and inexpensive to manufacture.

These and other objects are accomplished by an attachment device for a strap, comprising a base, means for attaching the base to a shoulder strap of a backpack and a releasable catch mechanism for securing an implement holder. The invention further comprises at least one implement holder adapted to be releasably secured to the base via the releasable catch mechanism.

The means for attaching the base to a backpack comprises two arms disposed along opposite edges of the base. Each arm has a transverse slit therethrough for threading the base onto a strap. Preferably, the slits are offset from the center of each arm so that removal and attachment of the base to a strap is made easier.

There can also be two additional arms disposed on the other opposite edges of the base, so that all four edges of the base have an arm. All of the arms have a transverse slit therethrough, so that the base is securable on two perpendicular straps. This feature is particularly important if the backpack has both shoulder straps and a chest strap. This way, the attachment device can be secured on both the chest strap and shoulder strap and cannot slide around at all.

The releasable catch mechanism comprises an upwardly extending side wall extending up from the top surface of the base and having an overhanging lip. A flexible arm is integrally formed with the base near the side wall and has a free end extending above the plane of the base. The implement holder comprises a plate, a holder portion attached to the top surface of the plate and an attachment portion extending from the bottom surface of the plate. The attachment portion comprises an outwardly extending flange. The implement holder is coupled to the base by inserting the flange underneath the overhanging lip. The flexible arm exerts upward pressure on the flange and forces it against the lip to hold it in place. The implement holder is released from the base by pressing down on the flexible arm and sliding the flange out from the lip. To keep the implement holder from sliding out from the lip, the side wall and overhanging lip are preferably U-shaped.

The implement holder can take many forms and can have an infinite number of variations, depending on the function for which it is used. One variation is a hydration tube holder comprising a plate and a flexible S-shaped arm attached at one end to the plate. A hydration tube is held in place by sliding the tube between the plate and the arm. The curve of the S on the arm prevents the tube from escaping.

Another variation is a flashlight holder comprised of a plate and a flexible C-shaped holder element attached at its center to the plate. A flashlight can be snapped into the C-shaped holder element and held there by the friction of the holder element. Another possibility is a D-ring pivotally attached to a plate. Preferably, the base is supplied with several implement holders so that a user can choose which implement holder to use each day.

In an alternative embodiment, the releasable catch mechanism comprises a circular wall with an inwardly overhanging lip. The implement holder comprises a plate having a top surface and a bottom surface, a holding portion attached to the top surface of the plate and two flexible bayonet catches extending from the bottom surface of the plate. The implement holder is attached to the base by inserting the bayonet catches within the circular wall such that they catch on the lip and secure the implement holder to the base.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects and features of the present invention will become apparent from the following detailed description considered in connection with the accompanying drawings. It is to be understood, however, that the drawings are designed as an illustration only and not as a definition of the limits of the invention.

In the drawings, wherein similar reference characters denote similar elements throughout the several views:

FIG. 1 shows a perspective view of the base of the attachment device according to the invention;

FIG. 2 shows the base as attached to shoulder and chest straps of a backpack;

FIG. 3 shows a perspective view of a hydration tube holder for use with the base;

FIG. 4 shows a cross-sectional view of the hydration tube holder and the base along lines IV - IV of FIG. 1;

FIG. 5 shows a cross-sectional view of the hydration tube holder inserted into the base;

FIG. 6 shows a perspective view of the flashlight holder for use with the base according to the invention;

FIG. 7 shows a side view of the flashlight holder;

FIG. 8 shows a perspective view of a D-ring for use with the base;

FIG. 9 shows a cross-sectional view of the base along lines IX - IX of FIG. 1;

FIG. 10 shows a cross-sectional view of the base of FIG. 9 in a release position;

FIG. 11 shows a perspective view of an alternative embodiment of the base according to the invention;

FIG. 12 shows a perspective view of an alternative embodiment of a hydration tube holder for use with the base shown in FIG. 11; and

FIG. 13 shows a side cross-sectional view of the hydration tube holder of FIG. 12 inserted in the base of FIG. 11.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now in detail to the drawings and, in particular, FIG. 1, there is shown the base 10 according to the invention, to which a variety of implement holders can be attached. Base 10 is an integrally molded one-piece design having four bars 11, 12, 13 and 14 for attaching base 10 to one or more straps. Each of bars 11, 12, 13, 14 has a transverse slit 15 therein to allow straps 16, 17 of a backpack 18 or other item to be easily threaded through base 10, as shown in FIG. 2.

The mechanism for attaching an implement to base 10 comprises a semicircular wall 19 having an overhanging lip 20, and a flexible arm 21, which has a free end extending away from wall 19. The free end of flexible arm 21 extends slightly above the top surface of base 10 to place upward pressure on an implement holder mounted within base 10, as explained below. Arm 21 has a transverse bar 22 extending across the free end of arm 21, and a protrusion 23 at the free end of arm 21. Transverse bar 21 and protrusion 23 serve to keep an implement holder in place once it is inserted underneath lip 20, to lock the implement holder within base 10. They also provide a convenient location for the user to press down on bar 21 to release implement holder as explained below.

One example of a suitable implement holder is a hydration tube clip 25, which is shown in FIG. 3. Tube clip 25 comprises a plate 26 with a resilient S-shaped arm 27 mounted above plate 26. A hydration tube (not shown) is slid in between plate 26 and arm 27. The tube is preferably wider than the lower end of arm 27 so that it cannot escape once it is mounted between plate 26 and arm 27. Clip 25 is secured to base 10 via a hexagonal flange 28, which extends outwardly beneath plate 26.

FIGS. 4 and 5 show the procedure for locking clip 25 into base 10. Flange 28 is slid underneath lip 20 and is pushed upward by arm 21 on base 10, to keep clip 25 locked within base 10.

Other suitable implement holders are a flashlight holder 30 or a D-ring 31, as shown in FIGS. 6-8. Flashlight holder 30 is held in place by a flange 32, similar to flange 28 on clip 25. Flashlight holder 30 has a C-shaped holding element 38 which functionally retains a flashlight therein. D-ring 31 is locked into base 10 is locked in a similar manner via flange 32. D-ring 31 is comprised of a ring portion 36 that is pivotally attached to flange 32 via a hinge 35 mounted in side brackets 34.

The various implement holders can be released from base 10 in a manner shown in FIGS. 9 and 10. The user merely presses downward on flexible arm 21 to create enough room to slide the implement holder out from base 10. This way, the implement holders are easily interchanged to accommodate the user's changing needs.

3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

An alternative embodiment of the invention is shown in FIGS. 11-13. In this embodiment, Base 100 as shown in FIG. 11 has bars 110, 120, 130 and 140, each having a transverse slit 150 for attaching base 100 to a strap in a similar way as that shown in FIG. 2. Base 100 is also equipped with a circular vertical wall 180, which has an inwardly overhanging lip 190, for locking an implement holder within base 100.

A suitable implement holder is shown in FIG. 12 in the form of a hydration tube clip 200. Tube clip 200 has two bayonet catches 220 mounted underneath clip 200. Bayonet catches 220 lock into lip 190 when clip 200 is pushed into base 100, as shown in FIG. 13. Any suitable implement holder having bayonet-type catches could be used with base 100. In addition, any alternative locking mechanism could be used to latch onto base 100 could also be used.

Accordingly, while only a few embodiments of the present invention have been shown and described, it is obvious that many changes and modifications may be made thereunto without departing from the spirit and scope of the invention.

WHAT IS CLAIMED IS:

Sub 1
a2

1. An attachment device for a strap, comprising:
- a base having a front surface, a rear surface and four edges and comprising:
 - means for attaching the base to a shoulder strap of a backpack;
 - a releasable catch mechanism for securing an implement holder; and
 - at least one implement holder adapted to be releasably secured to the base via said releasable catch mechanism.

2. The attachment device according to claim 1, wherein the means for attaching the base to a backpack comprises two arms disposed along opposite edges of said base, each arm having a transverse slit therethrough for threading said base onto ^{the} strap.

3. The attachment device according to claim 2, wherein ^{and} each slit is offset from the center of the arm.

4. The attachment device according to claim 2, further comprising two additional arms disposed on opposite edges of said base, so that all four edges of said base have an arm, said two additional arms each having a transverse slit therein, such that said base is securable on two perpendicular straps.

5. The attachment device according to claim 4, wherein said slits on said additional arms are offset from the center.

~~6. The attachment device according to claim 1, wherein the releasable catch mechanism comprises side wall extending up from the top surface of said base and having an overhanging lip, and a flexible arm integrally formed with said base and extending above the plane of said base.~~

a 7. The attachment device according to claim 4, wherein the implement holder comprises:

COPIES
a plate having a top surface and a bottom surface,
a holder portion attached to the top surface of the plate; and

an attachment portion extending from the bottom surface of the plate, said attachment portion comprising an outwardly extending flange,

wherein said implement holder is coupled to the base by inserting the flange underneath the overhanging lip and is held in place by the flexible arm, and wherein said implement holder is released from the base by pressing on the flexible arm and sliding the flange out from the lip.

a 8. The attachment device according to claim 4, wherein the side wall and overhanging lip are semicircular.

ORIGINAL OF THIS DOCUMENT

Sub
a27 9. ~~The attachment device according to claim 1, wherein the implement holder is a hydration tube holder comprising a plate and a flexible S-shaped arm attached at one end to the plate, wherein a hydration tube is held in place by sliding the tube between the plate and the arm.~~

10. The attachment device according to claim 1, wherein the implement holder is a flashlight holder comprised of a plate and a flexible C-shaped holder element attached at its center to the plate, such that a flashlight can be snapped into said C-shaped ~~holder element.~~

11. The attachment device according to claim 1, wherein the implement holder is a D-ring.

Sub
a27 12. ~~The attachment device according to claim 1, wherein the releasable catch mechanism comprises an enclosed wall with an inwardly overhanging lip, and wherein the implement holder comprises:~~

a plate having a top surface and a bottom surface;

a holding portion attached to the top surface of the plate; and

means for releasably fastening the implement holder to the base.

13. ~~The attachment device according to claim 12, wherein the means for releasably fastening the implement holders to the base are two outwardly facing bayonet catches extending from the bottom surface of the plate and wherein the implement holder is attached to the base by inserting the bayonet catches within said circular wall such that said bayonet catches catch on said lip and secure the implement holder to the base.~~

$$a^{\frac{1}{n}} = \sqrt[n]{a}$$

*Sub
a' 7*

ABSTRACT OF THE DISCLOSURE

An attachment device for a strap, comprising a base, means for attaching the base to a shoulder strap of a backpack and a releasable catch mechanism for securing an implement holder. The invention further comprises at least one implement holder adapted to be releasably secured to the base via the releasable catch mechanism. The releasable catch mechanism comprises an upwardly extending side wall extending up from the top surface of the base and having an overhanging lip. A flexible arm is integrally formed with the base near the side wall and has a free end extending above the plane of the base. The implement holder comprises a plate, a holder portion attached to the top surface of the plate and an attachment portion extending from the bottom surface of the plate. The attachment portion comprises an outwardly extending flange. The implement holder is coupled to the base by inserting the flange underneath the overhanging lip. The flexible arm exerts upward pressure on the flange and forces it against the lip to hold it in place. The implement holder is released from the base by pressing down on the flexible arm and sliding the flange out from the lip.

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

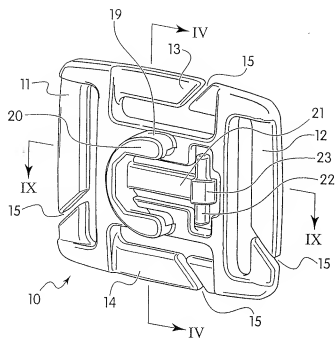


Fig. 1

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

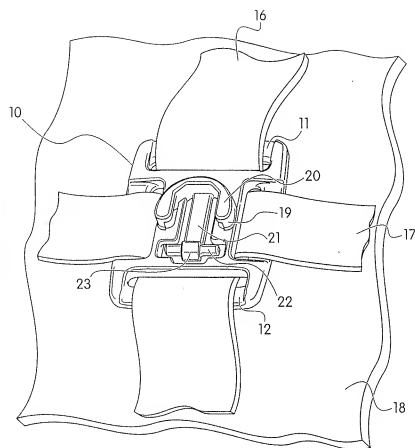


Fig. 2

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

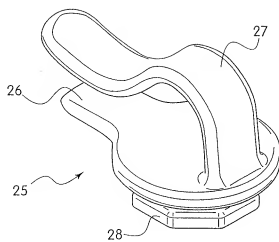


Fig. 3

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

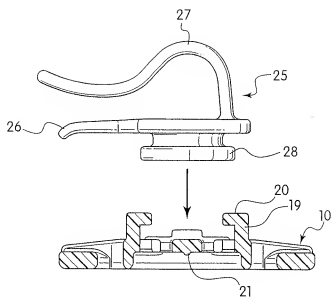


Fig. 4

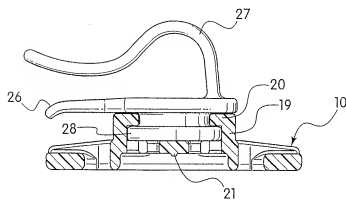


Fig. 5

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		




Fig. 6




Fig. 7

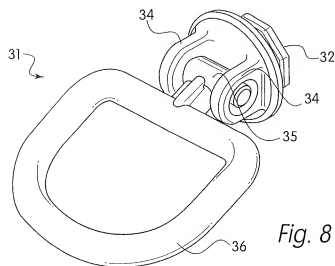


Fig. 8

FIG. 6

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

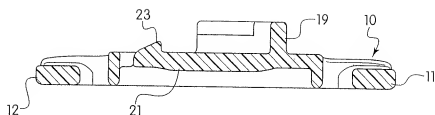


Fig. 9

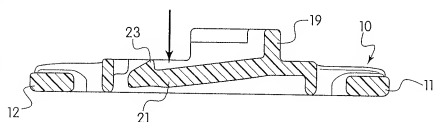


Fig. 10

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

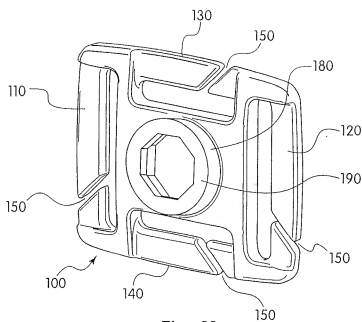


Fig. 11




Fig. 12

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

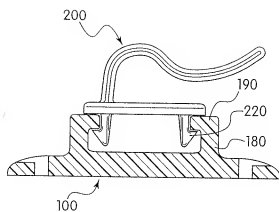


Fig. 13

A BUTTON-LATCH FASTENER

It is useful to employ a button as a means of removable attachment in situations which do not allow conventional use of the button. Ordinarily the connection by button requires that the button be passed through a "button hole", that the "button hole" be located at or near an edge of the material containing the hole in order to provide access to the button both above and below the hole as the button is passed through it.

In order for a button mounted on one surface to be attachable to another point on the surface or to any point on another surface, a device is needed, mountable to the surface at the desired point of attachment, which will provide removable engagement with the button.

Figs. 1-7 illustrate such a device, which is herein referred to as a button-latch fastener 10. In a preferred embodiment, the button-latch fastener incorporates a flange 12 at its periphery which serves as the point of attachment to a surface 14 on which it is mounted.



At one or more points more centrally located inside the periphery of flange 12, flexure of a latch 16 allows an appropriately sized button 18 to slide into the latch (See Figs. 5-6), to an attached position where the structure of the latch then resists any sliding of the button out of the latch. The button will then remain contained by the latch until the latch is manually flexed so as to permit sliding of the button out of the latch (See Fig. 7).

The button-latch fastener provides a mechanism for connection/attachment by the button 18, between layers of material in applications where the conventional "button hole" is not available or practical; in particular, in situations where at least one of the layers will accept installation of the button, and at least one of the layers will accept installation of the button-latch 16.

The button-latch fastener 10 is a general purpose fastener which may be used in combination with a button, primarily, though not exclusively, for removably attaching one layer of material (such as a flexible membrane) to another. In doing so, the button-latch 16 serves the same general purpose as a conventional "button hole". However, adaptations unique to the button-latch eliminate the need for a through hole for passing the button through one of the layers (membranes) being attached, as is typically required in order to secure both layers (membranes) in the "buttoned" position. The button-latch thus enables the layer (membrane surface) which would ordinarily contain the "button hole" to be a substantially uninterrupted surface, free of holes.

In the case of a membrane serving as a bladder for fluid containment, the button-latch 16 can, for example, be directly attached to the bladder surface. As the through-hole of conventional button fastening has been eliminated, the bladder membrane remains uninterrupted. Surface continuity, of course, is critical to the bladder's ability to contain fluid. The button-latch provides the necessary surface contiguity (holding one membrane layer to another in a secured position) while maintaining continuity of bladder surface, allowing the bladder membrane to maintain impermeability and fully contain fluid.

The button-latch fastener 16 readily accommodates both engagement with and disengagement from the "buttoned" position of a material or membrane containing the button 18, with a surface containing the latch 16. For example, the latch can be attached to a bladder surface of, for example, an air mattress, and the button can be attached to a fabric to be used, for example, as a mattress cover. Other uses of the button latch fastener readily apparent to one of skill in the art are intended to be within the scope of this disclosure.

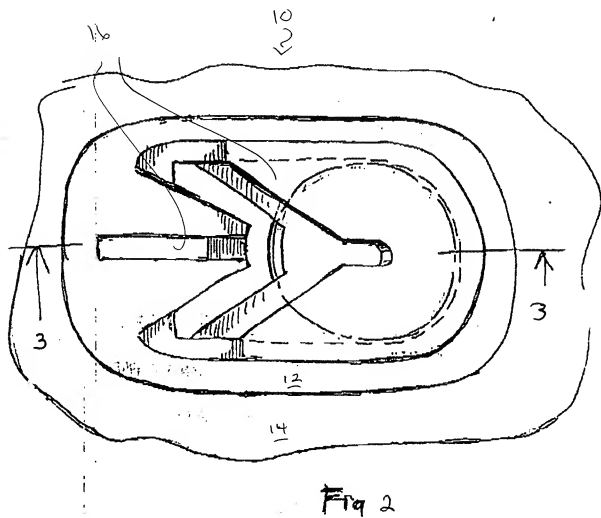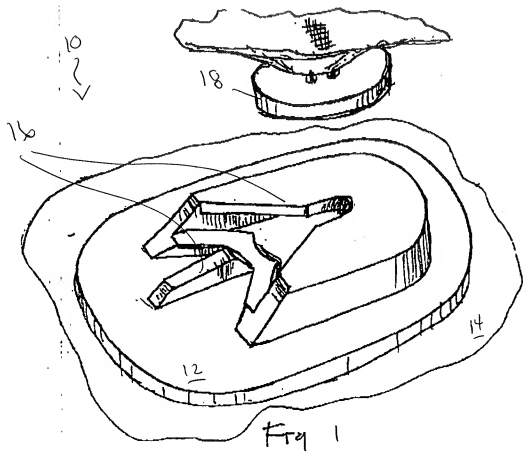

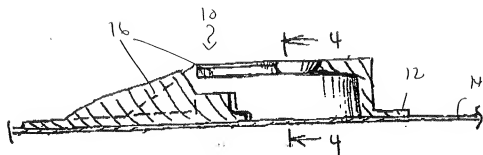


Fig 3

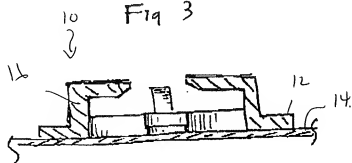


Fig 4

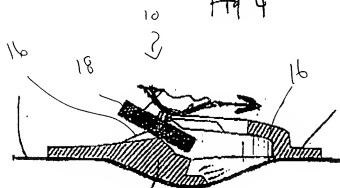


Fig 5



Fig 6

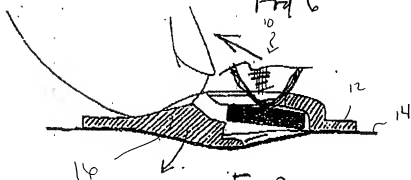


Fig 7